


## Bria 3.0 for Mac

If Bria is not already running, start it as you would any other program. The Bria Login dialog appears with the Profile set to “Manually configure login server”.


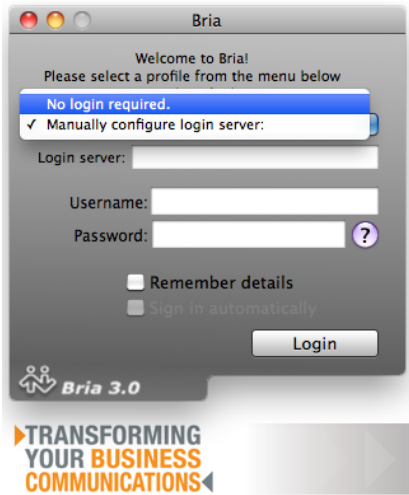


1. Change this to “No login required”

2. Click continue

3. Next click “Account settings” to begin configuration

4. Click the ‘+’ button in the bottom left hand corner and select “New SIP Account...”

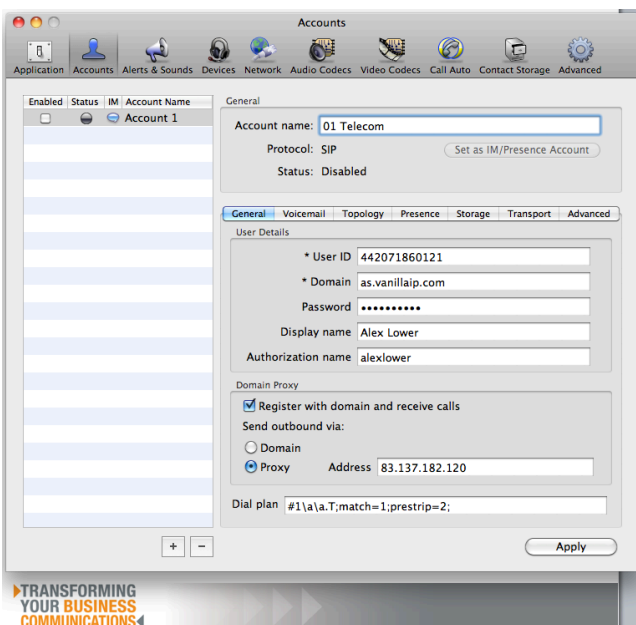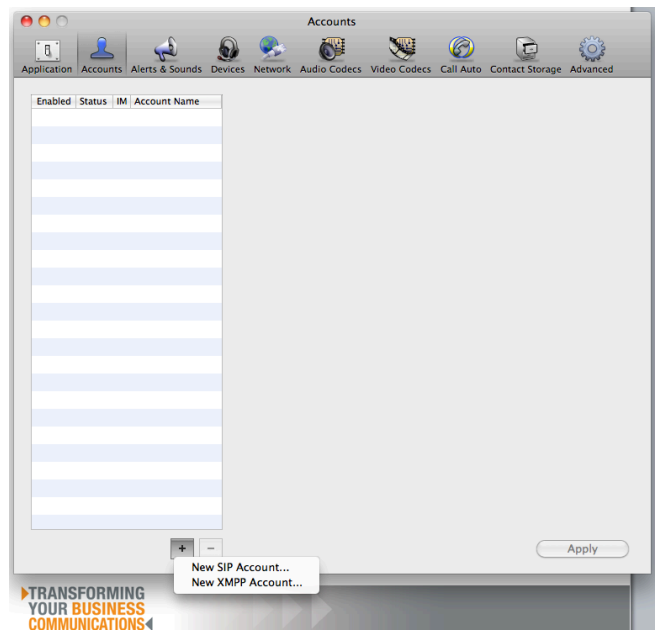

5. The change the following fields to your unique 01 Telecom user details:

- User ID 442071860121
- Domain as.vanillaip.com
- Password secretword
- Display name Alex Lower
- Authorization name alexlower
- Proxy Address 83.137.18.120


6. Then click ‘Apply’  
(this should change the status to ‘Enabled’)

7. Close this window

Your Bria Softphone is now configured and ready to use. If you wish to learn how to use the advanced features please download the full CounterPath User Guide from the [01 Telecom](#) website.

## Voicemail

1. Click Bria, followed by Preferences

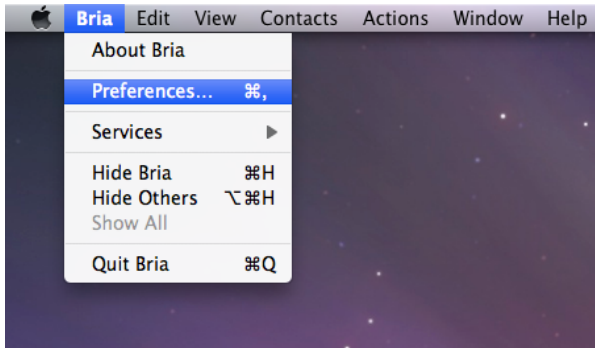


2. This will bring up the settings menu

3. Click 'Account' tab

4. Click the Voicemail tab, next to General and enter the 'Number to dial for checking voicemail' - default '555'

5. Next click 'Apply' and close the settings menu

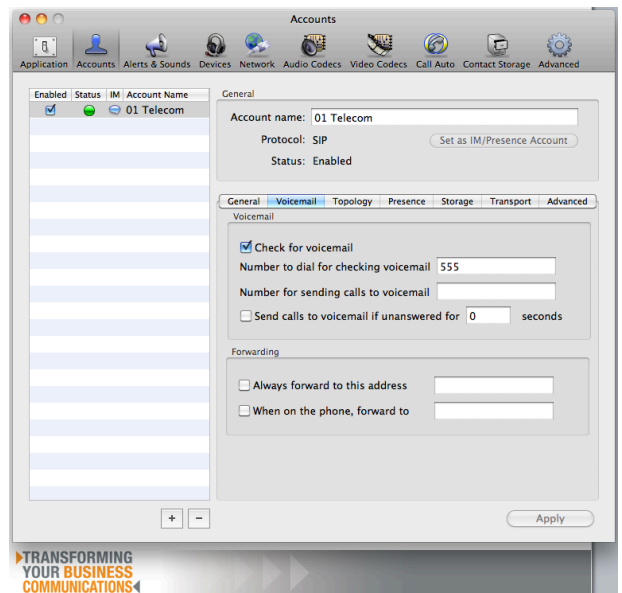

# 01

## Streamline Your Communications with 01 Telecom Hosted PBX

To find out how 01 Telecom can bring enhanced communications services to your business, go to [www.01telecom.co.uk](http://www.01telecom.co.uk) OR call 0207 186 0101.

01 Telecom Ltd